


NOVIFISH

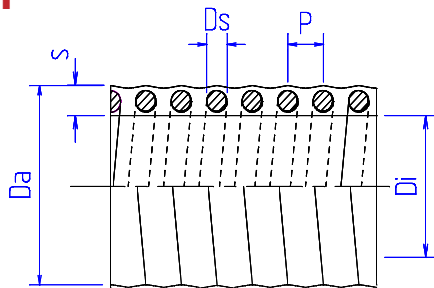

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m H2O	Coil length max m
102	118	3100	4x	3	9,5	20
152	168	5400	4x	2,5	9,5	20
203	223	10200	4x	2	9,5	10
254	283	13800	4x	1,5	9,5	10
305	336	18000	5x	1,5	9	10
356	392	24000	5x	0,5	8	10

Description

Extreme flexible hose, specially manufactured to be totally smooth internally.

Application

Exceptional hose for the transport of fish, either under suction or delivery. Heavy applications like suction and delivery of industrial waters and similar

Structure

Cristal clear flexible PVC wall reinforced with a shock resistant rigid PVC spiral

Colour

Standard colour Cristal clear body Grey spiral

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product