
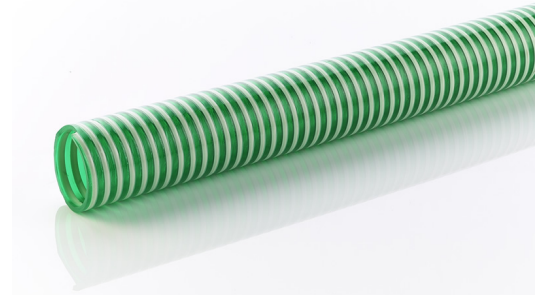


NOVIGREEN Standard

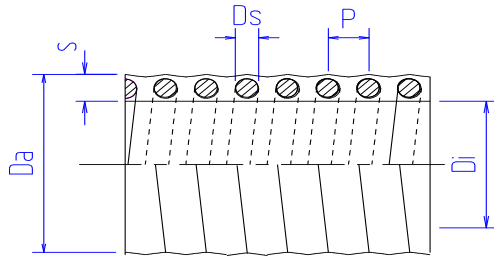

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
19	25	220	4 x	8	8	50
20	26	230	4 x	8	8	50
25	31,5	280	4 x	8	8	50
30	37	330	4 x	7	7	50
32	39	380	4 x	7	7	50
35	42	420	4 x	6,5	7	50
38	45	470	4 x	6	7	50
40	47	520	4 x	6	7	50
45	52,5	640	4 x	5,5	7	50
50	57,5	760	4 x	5,5	7	50
51	58,5	765	4 x	5	7	50
55	62,5	840	4.5 x	4,5	7	50
60	68	920	4.5 x	4	7	50
63	71	1020	4.5 x	4	7	50
65	73	1040	4.5 x	4	7	50
70	79	1180	4.5 x	4	7	30/50
75	84	1300	4.5 x	4	7	30/50
76	85	1350	4.5 x	4	7	30/50
80	91	1600	5 x	4	7	30/50
89	101	1850	5 x	4	7	30/50
90	102	1870	5 x	4	7	30/50
100	112,5	2200	5 x	4	7	30/50
102	114,5	2240	5 x	4	7	30/50
110	122,5	2500	5 x	3,5	7	30/50
120	132,5	2800	5 x	3	7	30/50
125	138,5	3200	5.5 x	3	7	20/30
127	140,5	3260	5.5 x	3	7	20/30
130	144	3320	5.5 x	3	7	20/30
150	165	4300	5.5 x	2,5	7	20
152	167	4350	5.5 x	2,5	7	20

Description

Light, flexible hose for general tasks. Good resistance to atmospheric conditions and chemicals.

Application

Specially suitable for agrarian industry. Suction and delivery hose for industrial and agricultural waters, fertilizers and pesticides.

Structure

Hose in flexible PVC with a rigid PVC spiral. Inside wall smooth.

Colour

Standard colour: Transparent green with a white spiral. Other colours upon request.

Working Temperature

-15° + 60° C.

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product