


BONZAI SE AS

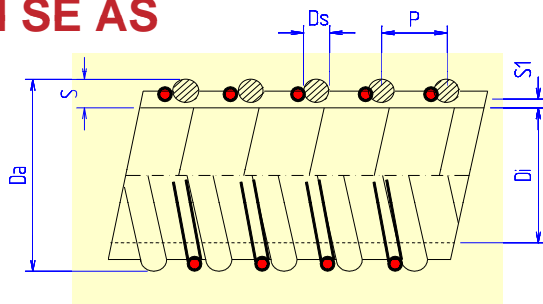

Appearance in reality may change

I. Diam ±4%	E. Diam ±4%	Weight ±4%	Min. Bending Radius	Max Working Pressure	Vacuum	Coil length max
mm	mm	g/m	n x Od	bar	m H2O	m
25	34	500	3 x	7	9	50
30	40	570	3 x	6	9	50
32	41	600	3 x	6	9	50
35	44	660	3 x	6	9	50
38	48	700	3 x	6	9	50
40	50	740	3 x	6	9	50
45	55,5	900	3 x	5,5	9	50
50	60,8	1050	3 x	5	9	50
51	61,8	1070	3 x	5	9	50
60	71,6	1300	3.5 x	4,5	9	50
63	75	1400	3.5 x	4,5	9	50
65	77,4	1500	3.5 x	4,5	9	50
70	83	1650	3.5 x	4	9	50
75	88	1700	3.5 x	4	9	50
76	89	1720	3.5 x	4	9	50
80	93	1900	3.5 x	4	9	50
90	104	2250	3.5 x	3,5	9	50
100	116	2630	3.5 x	3	9	50
102	118	2700	3.5 x	3	9	50
110	126	3100	4 x	3	9	30
120	136	3350	4 x	2,5	9	30
125	142	3820	4 x	2,5	9	30
127	144	3900	4 x	2,5	9	30
152	170	5000	4 x	2	9	20
203	226	10000	4 x	1,5	9	10

Description

Strong and flexible suction and delivery hose with a smooth inside wall and an external spiral which reduces hose wear. Very good resistance to atmospheric conditions and to chemicals.

Application

Specially suitable for industry and agriculture for the passage of waste water, manure, etc. For all applications where static electricity can be generated.

Structure

Flexible PVC hose with shock resistant rigid PVC spiral 8 strand copper static wire

Colour

Standard colour: grey with a blue spiral.

Working Temperature

-20° + 60°C

Contattat us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product