


NOVIVENT PU M HEAVY

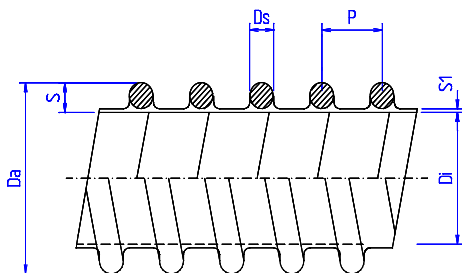

Appearance in reality may change

| I. Diam | E. Diam | Weight | Min. Bending Radius | Max Working Pressure | Vacuum | Coil length max |
|---------|---------|--------|---------------------|----------------------|---------|-----------------|
| ±4% | ±4% | ±4% | | | | |
| mm | mm | g/m | n x Da | bar | m water | m |
| 76 | 0,8 | 800 | 1 x | 1 | 5 | 20 |
| 110 | | 1420 | 1 x | 1 | 5 | 20 |
| 152 | 1,2 | 2000 | 2,5 x | 0,7 | 4,5 | 20 |
| 160 | 1,15 | 2250 | 2,5 x | 0,7 | 4,5 | 20 |
| 203 | 1,4 | 3300 | 3 x | 0,5 | 4 | 12,5 |
| 254 | 1,7 | 3900 | 4x | 0,3 | 4 | 12,5 |

Description

Excellent resistance against: Hydrolysis, Oil and chemicals, microbes, abrasion and wear

Application

Heavier tasks than Novivent standard. Especially suitable for abrasive dusts, cement, cereal grains, sugar and other granules. Taking up large market shares for fish suction in sea, 60 m down below surface.

Structure

All diameters from 51 to 355 possible upon request.

Colour

Standard colour: Transparent with blue spiral. Other colours upon request.

Working Temperature

-25° + 85° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product