


**NEW GENERATION PU AS**

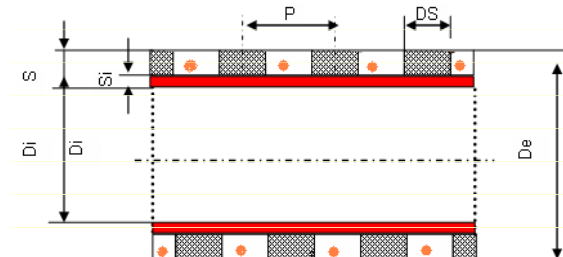

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
32	40,5	760	3x	8,5	9	30/50
38	46,4	900	3x	8	9	30/50
45	52,5	1100	3x	7,5	9	30/50
50	58,4	1155	3x	7	9	30/50
51	59,4	1165	3x	7	9	30/50
63	72	1580	3x	6,5	9	30/50
75	85,2	2005	3,5x	6	9	30/50
76	86,2	2010	3,5x	6	9	30/50
80	90,4	2245	3,5x	5,5	9	30/50
90	106	2500	3,5x	5,5	9	30/50
100	115	2950	3,5x	5	9	30/50
102	117	3000	3,5x	5	9	30/50
110	121	3255	3,5x	4,5	9	30/50
127	140,1	4180	4x	4	9	30
152	166,2	5460	4x	3,5	9	20
203	224,4	9530	4x	3	9	10

**Description**

Patented hose with special design: although extremely light and flexible, the mechanical characteristics of this hose are the same as the heavy duty hoses on the market.

**Application**

For medium applications. Suction and pressure hose in many industry sectors like civil works, for liquids flow delivery of pellets, etc. Resistant to many chemicals, brine and sea water, as well as to bending. Specially suitable for applications in cool conditions, also when maximum flexibility is required.

**Structure**

Hose in soft PVC with a hard PVC spiral shock resistant. Strand copper anti-static wire (red dot). PU liner abrasion resistance < 40 mm<sup>3</sup>

**Colour**

Standard colour: orange with a grey spiral, or grey with a grey spiral. Special version transparent flexible PVC with grey spiral and red PU liner

**Working Temperature**

-25 + 60° C

**Please contact us for additional versions**

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product