


MEDIUM DUTY SE

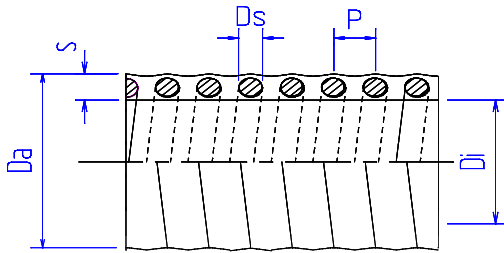

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
25	33,4	485	5 x	9	9	50
30	38,6	550	5 x	9	9	50
32	40,8	580	5 x	8,5	9	50
35	43,8	640	5 x	8	9	50
38	47	680	5 x	8	9	50
40	49	715	5 x	7	9	50
45	54,2	870	5 x	7	9	50
50	59,4	1020	5 x	6	8,5	50
51	60,4	1030	5 x	6	8,5	50
55	64,5	1095	5 x	6	8,5	50
60	70	1260	5 x	5,5	8,5	50
63	73,4	1360	5 x	5,5	8,5	50
65	75,4	1455	5 x	5,5	8,5	50
70	81	1600	5 x	5,5	8,5	30/50
75	86,6	1700	5 x	5	8,5	30/50
76	87,6	1750	5 x	5	8,5	30/50
80	91,8	1845	5 x	4,5	8,5	30/50
90	102,4	2035	5 x	4,5	8	30/50
100	113	2620	5 x	4,5	8	30/50
102	115	2650	5 x	4,5	8	30/50
110	123,6	3000	5 x	4	8	30/50
120	133,6	3250	5 x	4	8	30/50
125	139	3490	5 x	3,5	8	30/20
127	141	3540	5 x	3,5	8	30/20
150	165,6	4365	5 x	3	8	20
152	167,6	4400	5 x	3	8	20
160	175,6	5340	6 x	3	8	20
203	222	7800	5 x	2,5	8	10
254	276	11640	6 x	2	8	10

Description

Suction and pressure hose for medium applications

Application

For medium applications. Suction and pressure hose in many industry sectors in constructions, for liquids, passage of pellets, etc. Resistant to many chemicals, brine and sea water, as well as to bending. (S.E.) Super Elastic type, specially suitable for application in cool conditions, also when max. flexibility is required. Also available in FDA approved version.

Structure

Flexible PVC wall with a rigid PVC shock resistant spiral.

Colours

metallic green

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product