


# NOVIDRINK HEAVY

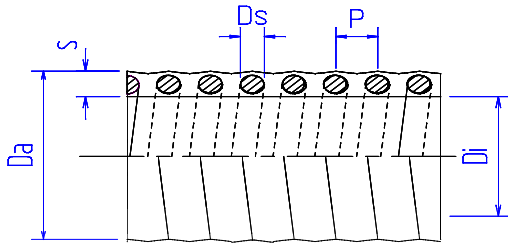

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
25	34,4	550	5x	10	9	30/50
30	40	650	5x	10	9	30/50
32	42	700	5x	10	9	30/50
35	45	750	5x	9	9	30/50
38	48	800	5x	9	9	30/50
40	50	850	5x	9	9	30/50
45	56	1000	5x	8	9	30/50
50/51	62	1200	5x	8	9	30/50
55	66,6	1400	6x	7,5	9	30/50
60	71,6	1600	6x	7,5	9	30/50
63	75,4	1670	6x	7	9	30/50
65	78	1760	6x	7	9	30/50
70	83,6	1900	6x	6,5	9	30/50
76	89,6	2030	6x	6,5	9	30/50
80	94	2200	6,5x	6,5	9	30/50
89	104	2600	6,5x	5,5	9	30/50
90	105	2625	6,5x	5,5	9	30/50
100/102	118	3360	6,5x	5	9	30/50
110	127	3650	6,5x	4,5	9	30
127	145	4270	6,5x	3	9	30
150/152	173	6320	7x	3	9	20
160	182	7500	7x	3	9	10
203	226	10000	7x	3	9	10

## Description

Suction and delivery hose for of liquids.

## Application

For heavy applications. Suction and delivery hose in many industries. Suitable for transfer of liquid foods with maximum alcohol content of 28%

## Structure

Hose in soft PVC with a hard PVC spiral shock resistant.

## Colour

Transparent soft PVC, red spiral

## Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product