


NOVIMETAL PU

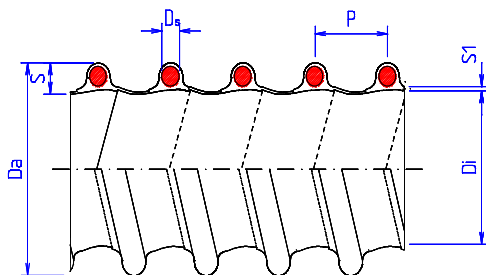

Appearance in reality may change

| I. Diam ±4% mm | E. Diam ±4% mm | Weight ±4% g/m | Min. Bending Radius n x Da | Max Working Pressure bar | Vacuum m water | Coil length max m |
|----------------------|----------------------|----------------------|-------------------------------|-----------------------------|-------------------|----------------------|
| 25 | | 180 | 1x | 1 | 3 | 20 |
| 30 | | 200 | 1x | 1 | 3 | 20 |
| 32 | | 240 | 1x | 1 | 3 | 20 |
| 35 | | 245 | 1x | 1 | 3 | 20 |
| 38 | | 250 | 1x | 1 | 3 | 20 |
| 40 | | 270 | 1x | 1 | 3 | 20 |
| 45 | | 280 | 1x | 1 | 3 | 20 |
| 50 | | 330 | 1x | 1 | 3 | 20 |
| 51 | | 330 | 1x | 1 | 3 | 20 |
| 55 | | 390 | 1x | 1 | 3 | 20 |
| 60 | | 440 | 1x | 1 | 3 | 20 |
| 63 | | 460 | 1x | 1 | 3 | 20 |
| 65 | | 480 | 1x | 1 | 3 | 20 |
| 70 | | 490 | 1x | 1 | 2,5 | 20 |
| 75 | | 530 | 1x | 1 | 2,5 | 20 |
| 76 | | 530 | 1x | 1 | 2,5 | 20 |
| 80 | | 500 | 1x | 1 | 2,5 | 20 |
| 90 | | 680 | 1x | 1 | 2,5 | 20 |
| 100 | | 700 | 1x | 1 | 2,5 | 20 |
| 110 | | 720 | 1x | 1 | 2,5 | 20 |
| 120 | | 1000 | 1x | 1 | 2,5 | 20 |
| 127 | | 1100 | 1x | 0,5 | 2,5 | 20 |
| 130 | | 1100 | 1x | 0,5 | 1,2 | 20 |
| 140 | | 1150 | 1x | 0,5 | 1,2 | 20 |
| 152 | | 1250 | 1x | 0,5 | 1,2 | 20 |
| 160 | | 1280 | 1x | 0,5 | 1 | 10 |
| 180 | | 1350 | 1x | 0,5 | 0,5 | 10 |
| 203 | | 1500 | 1x | 0,5 | 0,5 | 10 |
| 254 | | 2300 | 1x | 0,5 | 0,3 | 10 |
| 305 | | 3200 | 1x | 0,5 | 0,3 | 10 |
| 355 | | 3800 | 1x | 0,5 | 0,2 | 10 |

Description

Very light and flexible hose. Smooth inner as produced on a mandrell causing less pressure loss. Good resistance against abrasion, oils and grease as well as atmospheric conditions.

Application

Suction and air hose for: Ventilation, smoke, dust, textile fibre, grains, pellets. For any application where static electricity can be generated use the steel spiral to earthen the hose assembly. Food Quality according to FDA and CE regulations for dry foodstuffs

Structure

Hose with a transparent food quality Polyurethane wall reinforced with a copper plated steel spiral. Smooth inner wall

Colour

Standard colour: transparent with copper plated steel spiral.

Working Temperature

-40° + 90°C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product