
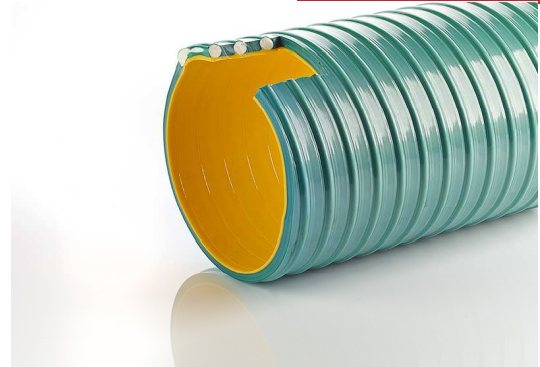


INDUSTRIAL NO ABRASION

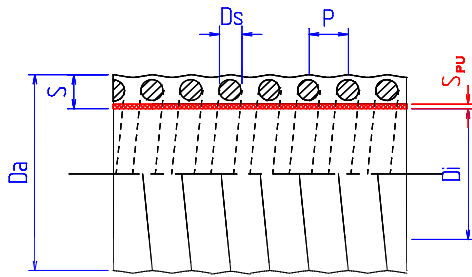

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
32	42	700	7x	10	9	30/50
35	45	750	7x	9	9	30/50
38	48	800	7x	9	9	30/50
40	50	850	7x	9	9	30/50
45	56	1000	7x	8	9	30/50
50	61	1200	7x	8	9	30/50
51	62	1250	7x	8	9	30/50
55	66,5	1400	7x	7,5	9	30/50
60	72	1600	7x	7,5	9	30/50
63	75,5	1670	7x	7	9	30/50
65	78	1750	7x	7	9	30/50
70	84	1900	7x	6,5	9	30/50
75	89	2000	7x	6,5	9	30/50
76	90	2100	7x	6,5	9	30/50
80	94	2200	7x	6,5	9	30/50
89	104	2600	8x	5,5	9	30/50
90	105	2650	8x	5,5	9	30/50
100	116	3300	8x	5	9	30
102	118	3400	8x	5	9	30
110	127	3650	8x	4,5	9	30
120	138	4000	8x	4	9	30
125	143	4200	8x	3	9	30
127	145	4300	8x	3	9	30
150	171	6300	8x	3	9	20
152	173	6400	8x	3	9	20
203	227	10500	9x	3	9	10
254	276	13400	10x	2	9	10

Description

Superior resistance against pressure, vacuum and internal abrasion.

Application

Suction and delivery hose in particular for sand, gravel, cement, slurry etc. Specially suitable for abrasive mediums. Resistant to atmospheric conditions and to most chemicals. Also available with food approved PU according to FDA and CEE standards

Structure

Flexible PVC hose with rigid PVC spiral and PU liner. Thicker PU liner upon request

Colour

Standard: metallic green wall, ivory spiral, red PU liner FQ: orange wall, white PU, ivory spiral. Available in other colours upon request

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product