


BONZAI NO ABRASION

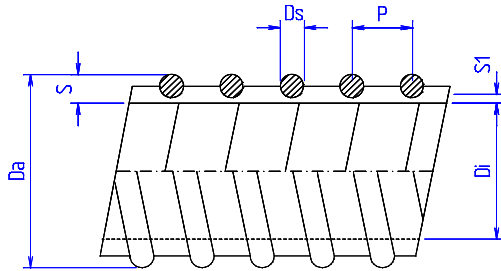

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m H2O	Coil length max m
25	34	550	3 x	8,5	9	50
32	41	650	3 x	8,5	9	50
38	48	755	3 x	8	9	50
45	55,5	965	3 x	7,5	9	50
50	60,8	1075	3 x	7	9	50
51	61,8	1125	3 x	7	9	50
55	66,2	1170	3 x	7	9	50
60	71,6	1350	3.5 x	6,5	9	50
63	75	1490	3.5 x	6,5	9	50
65	77,4	1545	3.5 x	6,5	9	50
70	83	1700	3.5 x	6	9	50
75	88	1790	3.5 x	6	9	50
76	89	1810	3.5 x	6	9	50
80	93	1970	3.5 x	5,5	9	50
90	104	2380	3.5 x	5,5	9	50
100	116	2745	3.5 x	5	8,5	50
102	117,6	2850	3.5 x	5	8,5	50
110	126	3260	4 x	4,5	8,5	30
120	136	3425	4 x	4,5	8,5	30
125	142	3980	4 x	4	8,5	30
127	144	4085	4 x	4	8,5	30
152	170	5225	4 x	3,5	8	20
203	226	10270	4 x	3	8	10

Description

Strong and flexible suction and pressure hose with a smooth inside wall and an external spiral which reduces the hose wear. PU liner for oil and abrasion resistance Very good resistance to atmospheric conditions and to chemicals.

Application

Specially suitable for industry and agriculture for the passage of waste water, manure, animal feed, granules, sand, gravel and other abrasive materials. For all applications where static electricity can be generated

Structure

Flexible PVC hose with shock resistant rigid PVC spiral 8 strand copper static wire Available With various PU thicknesses upon request.

Colour

Standard colour No Abrasion: Pu liner yellow

Working Temperature

-20° + 60°C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product