


NEW GENERATION PU

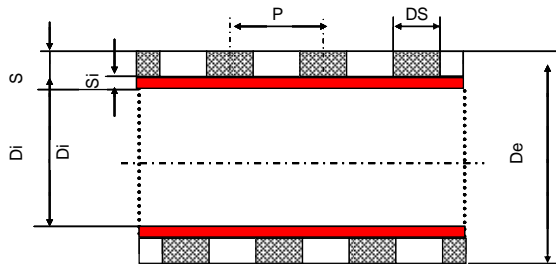

Appearance in reality may change

I. Diam $\pm 4\%$ mm	E. Diam $\pm 4\%$ mm	Weight $\pm 4\%$ g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
32	40,5	710	3x	8,5	9	30/50
38	46,4	850	3x	8	9	30/50
45	52,5	1045	3x	7,5	9	30/50
50	58,4	1095	3x	7	9	30/50
51	59,4	1105	3x	7	9	30/50
63	72	1515	3x	6,5	9	30/50
75	85,2	1935	3,5x	6	9	30/50
76	86,2	1940	3,5x	6	9	30/50
80	90,4	2165	3,5x	5,5	9	30/50
90	106	2420	3,5	5,5	9	30/50
102	117	2920	3,5x	5	9	30/50
110	121	3175	3,5x	4,5	9	30/50
127	140,1	4100	4x	4	9	30
152	166,2	5370	4x	3,5	9	20
203	224,4	9430	4x	3	9	10

Description

Patented hose with special design: although extremely light and flexible, the mechanical characteristics of this hose are the same as heavy duty hoses on the market.

Application

Suction and delivery hose in particular for sand, gravel, cement, slurry etc. Specially suitable for abrasive mediums. Resistant to atmospheric conditions and to most chemicals. Also available with food approved PU according to FDA and CEE standards

Structure

Flexible PVC hose with rigid PVC spiral and PU liner. Thicker PU liner upon request

Colour

Standard colour: orange with a grey spiral, or grey with a grey spiral. Red PU-liner Other colours upon request

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product