


NEW GENERATION BUNA

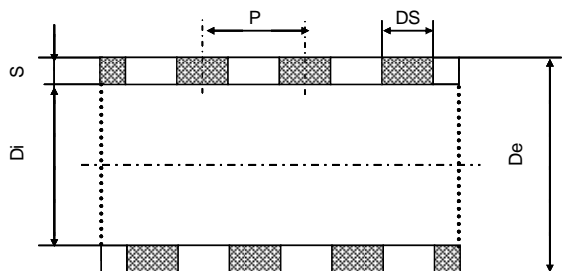

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
19	25	320	3x	7	8	50
25	33	350	3x	7	8	50
32	40,5	540	3x	6,5	8	50
38	46,4	650	3x	6	8	50
45	52,5	750	3x	6	8	50
50	58,4	850	3x	5,5	8	50
51	59,4	850	3x	5,5	8	50
60	68,8	1000	3x	4,5	8	50
63	72	1150	3x	4,5	8	50
65	73,8	1180	3x	4	8	50
70	80,2	1300	3x	4	8	50
75	85,2	1500	3,5x	4	8	50
76	86,2	1500	3,5x	4	8	50
80	90,4	1700	3,5x	4	8	50
90	106	1900	3,5	3,6	8	30
102	117	2200	3,5x	3,6	8	30
110	121	2400	3,5x	3,2	8	30
120	131,2	2800	3,5x	3	8	30
127	140,1	3200	4x	2,5	8	30
152	166,2	4300	4x	2	8	20
160	173,6	4600	4x	2	8	20
203	224,4	8000	4x	2	8	10

Description

Patented hose with special design: although extremely light and flexible, the mechanical characteristics of this hose are the same as the heavy duty hoses on the market.

Application

For medium applications. Suction and pressure hose in many industry sectors like civil works, for liquids flow, cleaning of canalisations, etc. Resistant to many chemicals, brine and sea water, as well as to bending. Specially suitable for applications in cool conditions, also when maximum flexibility is required.

Structure

Flexible wall of PVC - BUNA and a shock resistant rigid PVC spiral.

Colour

Standard colour: orange with a grey spiral, or grey with a grey spiral.

Working Temperature

-30 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product