


NOVIAIR

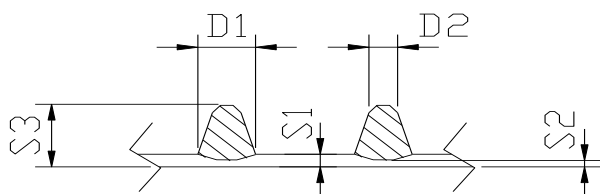

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
12	18	86	1	2	6	30
14	20	92	1	2	6	30
16	21,5	100	1	2	6	30
19	24,5	110	1	2	6	30
20	26	115	1	2	6	30
25	31,6	155	1	2	5,5	30-50
30	36,6	210	1	2	5,5	30-50
32	39	230	1	1,5	5,5	30-50
35	43	260	1	1,5	5,5	30-50
38	46	300	1	1,5	5,5	30-50
40	49	320	1	1,5	5,5	30-50
45	53	395	1	1,5	5	30-50
50	59	485	1	1,5	5	30-50
51	60	510	1	1,5	5	30-50
55	64,5	530	1	1,5	5	30-50
60	71	580	1	1,5	5	30-50
63	74	605	1	1,5	5	30-50
65	76	630	1	1,5	5	30-50
70	81	680	1	1,5	5	30-50
75	86	755	1	1,5	5	30-50
76	87	765	1	1,5	5	30-50
80	92	870	1	1,5	5	30-50
89	101	945	1	1,5	5	30-50
90	103	1020	1	1,5	5	30-50
100	124	1210	1	1	5	30-50
102	119	1230	1	1	4,5	30-50
110	125	1360	1	1	4,5	30-50
120	135	1455	1	1	4,5	30-50
125	140	1550	1	1	4,5	30-50
127	142	1600	1	1	4,5	30-20
130	144	1650	1	1	4,5	30-20
140	154	1800	1	1	4,5	30-20
150	164	1965	1	1	4	30-20
152	166	2135	1	1	4	30-20
160	175	2280	1	0,5	3	30-20
180	195	2500	1	0,5	3	20
203	220	3055	1	0,5	2	20
250	270	3900	1	0,25	1,5	10
300	325	5500	1	0,25	1	10

Description

Very flexible and light hose.

Application

Suction hose for: Ventilation and extraction of smoke, dust and textile fibres

Structure

Flexible PVC wall with rigid PVC spiral. The particular and unique design of the spiral confers to the hose an excellent radial resistance against internal and external pressure. Smooth inner.

Colour

Standard colour: clear grey with grey rigid spiral. Other colours upon request.

Working Temperature

-15° + 65°C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product