


NOVIGREEN heavy SE

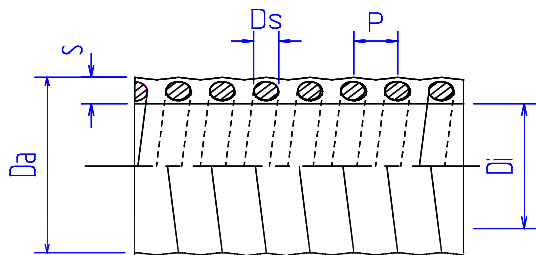

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
19	25,5	300	5 x	8	7,5	50
20	26,5	315	5 x	8	7,5	50
25	32,5	400	5 x	7,5	7	50
30	37,5	450	5 x	7,5	7	50
32	39,5	480	5 x	7	7	50
35	43	550	5 x	6,5	7	50
38	46	580	5 x	6,5	7	50
40	48,5	600	5 x	6	7	50
45	53	700	5 x	5,5	7	50
50	58	850	5 x	5	7	50
51	59,5	865	5 x	5	7	50
55	63,5	940	5 x	5	6,5	50
60	69	1000	5 x	4,5	6,5	50
63	72	1100	5 x	4,5	6,5	50
65	74	1130	5 x	4,5	6,5	50/30
70	80	1250	5 x	4,5	6,5	50/30
75	85	1400	5 x	4	6,5	50/30
76	86	1420	5 x	4	6,5	50/30
80	90,5	1600	5 x	3,5	6,5	50/30
89	101	1850	5 x	3,5	6,5	50/30
90	102	1870	5 x	3,5	6,5	50/30
100	112,5	2200	5 x	3,5	6,5	50/30
102	114,5	2240	5 x	3	6,5	50/30
110	122,5	2500	5 x	3	6,5	50/30
120	132,5	2800	5 x	2,5	6,5	50/30
125	138,5	3200	5 x	2,5	6,5	30/20
127	140,5	3260	5 x	2,5	6	30/20
130	144	3320	5 x	2	6	20
150	165	4300	5 x	2	6	20
152	167	4350	5 x	2	6	20

Description

Resistant to all atmospheric conditions Good resistance to chemicals.

Application

Specially suitable for agricultural industry. Suction and delivery hose for industrial and agricultural waters, fertilizers and pesticides. Suitable for low temperatures.

Structure

Flexible PVC wall with shock resistant rigid PVC spiral

Colour

Standard colour: transparent green Other colours upon request.

Working Temperature:

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product