


**NOVIOIL**

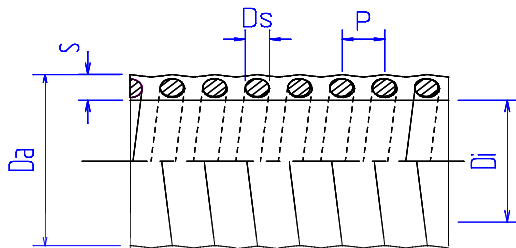

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
19	26,2	400	4 x	8	8	50
20	27,2	400	4 x	8	8	50
25	33,4	500	4 x	8	8	50
30	38,6	550	4 x	8	8	50
32	40,8	600	4 x	8	8	50
35	43,8	650	4 x	7	8	50
38	47	700	4 x	7	8	50
40	49	740	4 x	7	8	50
45	54,2	900	4 x	6,5	8	50
50	59,4	1050	4 x	5,5	8	50
51	60,4	1070	4 x	5,5	8	50
55	64,6	1100	5 x	5,5	8	50
60	70	1260	4 x	5	8	50
63	73,4	1400	4 x	5	8	50
65	75,4	1500	4 x	5	8	50
70	81	1600	4 x	5	8	50
75	86,6	1750	4 x	4,5	8	30-50
76	87,6	1800	4 x	4,5	8	30-50
80	92	1900	4 x	4	8	30-50
90	102,4	2150	4 x	4	8	30-50
100	113	2700	4 x	4	8	30-50
102	115	2750	4 x	4	8	30-50
127	141	3600	4 x	2,5	7	20-30
152	167,6	4500	4 x	2	7	20-30

**Description**

Good resistance to pressure and vacuum. Extremely flexible. Very good resistance to all atmospheric conditions.

**Application**

For middle and heavy industrial applications. Excellent Oil resistance

**Structure**

Nitril rubber combined with Superelastic PVC with a shock resistant rigid PVC Spiral Smooth inside wall. Special Nitril-PVC suitable for the transport of petro-chemicals

**Colour**

Standard colour: blue / white spiral.

**Working Temperature:**

-20° + 60° C

**Please contact us for additional versions**

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product