


NOVIAIR SI

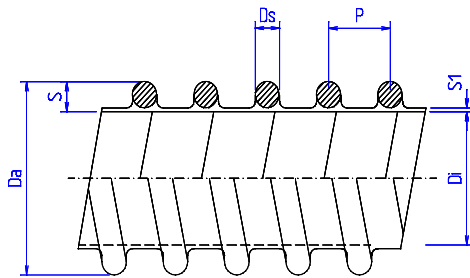

Appearance in reality may change

I. Diam ±4%	E. Diam ±4%	Weight ±4%	Min. Bending Radius	Max Working Pressure	Vacuum	Coil length max
mm	mm	g/m	n x Da	bar	m water	m
20	25	115	1	1	5,5	30
25	30	165	1	1	5,5	30
30	35	190	1	0,5	5	30
32	38	205	1	0,5	5	30
35	41	230	1	0,5	5	30
38	45	260	1	0,5	5	30
40	46	270	1	0,5	5	30
45	52	345	1	0,5	4,5	30
50	57	435	1	0,5	4,5	30
55	62	475	1	0,5	4,5	30
60	69	520	1	0,5	4,5	30
63	71	545	1	0,5	4	30
65	74	570	1	0,5	4	30
70	79	620	1	0,5	4	30
76	85	675	1	0,5	4	30
80	90	755	1	0,5	4	30
90	101	805	1	0,5	4	30
102	112	970	1	0,5	4	30
110	120	1065	1	0,5	3,5	30
120	132	1160	1	0,5	3,5	30
127	138	1230	1	0,5	3,5	30
130	142	1260	1	0,5	3,5	20
140	152	1455	1	0,5	3,5	20
152	164	1670	1	0,5	3,5	20
160	173	1840	1	0,25	3	20
180	193	2130	1	0,25	3	10
203	217	2360	2	0,25	3	10
250	264	3245	2	0,10	3	10
300	316	3975	2	0,10	3	10

Description

Very flexible and light hose.

Application

Suction (Pressure) hose for: Ventilation, smoke, dust, textile fibres.

Structure

Soft PVC cover with shock resistant PVC spiral. The particular and unique production technology confers to the hose a concentric, perfect wall as well as an excellent bending behaviour. Smooth inside wall

Colour

Wall: dark grey Spiral: ivory
Other colours upon request

Working Temperature

-15° + 65°C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product