


BONZAI Buna

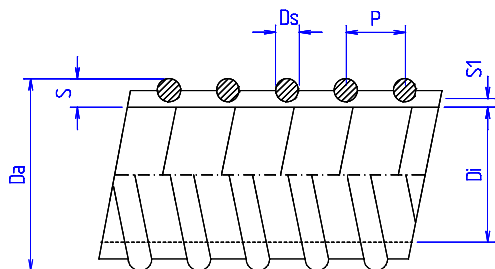

Appearance in reality may change

I. Diam ±4%	E. Diam ±4%	Weight ±4%	Min. Bending Radius	Max Working Pressure	Vacuum	Coil length max
mm	mm	g/m	n x Od	bar	m H2O	m
25	34	500	3 x	7	9	50
30	40	570	3 x	6	9	50
32	41	600	3 x	6	9	50
35	44	660	3 x	6	9	50
38	48	700	3 x	6	9	50
40	50	740	3 x	6	9	50
45	55,5	900	3 x	5,5	9	50
50	60,8	1050	3 x	5	9	50
51	61,8	1070	3 x	5	9	50
60	71,6	1300	3.5 x	4,5	9	50
63	75	1400	3.5 x	4,5	9	50
65	77,4	1500	3.5 x	4,5	9	50
70	83	1650	3.5 x	4	9	50
75	88	1700	3.5 x	4	9	50
76	89	1720	3.5 x	4	9	50
80	93	1900	3.5 x	4	9	50
90	104	2250	3.5 x	3,5	9	50
100	116	2630	3.5 x	3	9	50
102	118	2700	3.5 x	3	9	50
110	126	3100	4 x	3	9	30
120	136	3350	4 x	2,5	9	30
125	142	3820	4 x	2,5	9	30
127	144	3900	4 x	2,5	9	30
152	170	5000	4 x	2	9	20
203	226	10000	4 x	1,5	9	10

Description

Strong and flexible suction and pressure hose with a smooth inside wall and an external spiral which reduces the hose wear. Made with a so called Buna material, it offers a very good resistance to most chemicals, animal fat and to atmospheric conditions.

Application

Specially suitable for industry and agriculture for the passage of waste water, manure, etc.

Structure

Hose in soft Buna PVC with an external rigid shock resistant PVC spiral.

Colour

Standard colour grey with a grey spiral.

Working Temperature

-20° + 60°C

Contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product