
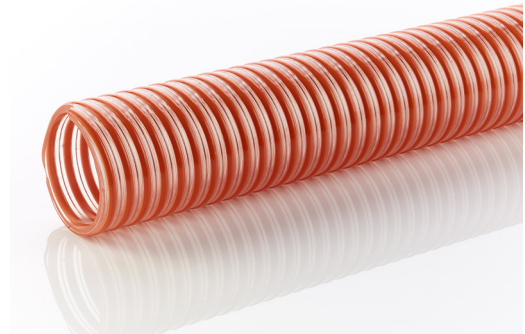


SUPERGRANULAT PU AS

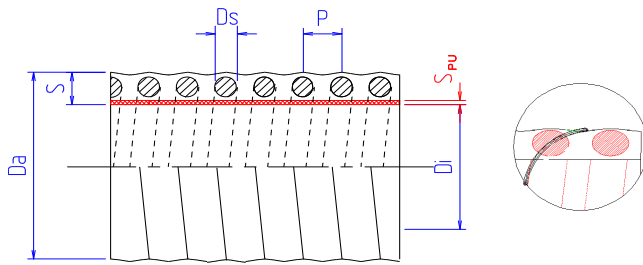

Appearance in reality may change

I. Diam ±4%	E. Diam ±4%	Weight ±4%	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
30	36,5	525	4,5	8	7,5	30
32	39	570	4,5	8	7,5	30
38	45	600	4,5	8	7,5	30
40	47,8	640	4,5	8	7,5	30
45	52,8	680	4,5	8	7,5	30
50	58	825	4,5	7	7,5	30
51	59	850	4,5	7	7,5	30
55	63	900	4,5	7	7,5	30
60	68,4	985	4,5	7	7,5	30
63	71,2	1085	4,5	6	7,5	30
65	73	1160	4,5	6	7,5	30
70	79,6	1235	5,5	5,5	7,5	30
75	84,6	1370	5,5	5,5	7,5	30
76	85	1390	5,5	5	7,5	30
80	90,6	1675	5,5	5	7,5	30
89	101	1925	5,5	4,5	7,5	30
90	102	1940	5,5	4,5	7,5	30
102	114,6	2340	5,5	4,5	7,5	30
120	133	2890	5,5	4	7,5	30
127	141	3350	5,5	4	7,5	20
152	167	4450	5,5	4	7,5	20
160	176	4580	5,5	4	7,5	20
180	176	5920	5,5	3	7,5	10
200	218	6850	6	2,5	7,5	10

Description

Light and flexible hose
Abrasion resistant PU-liner 8 strand copper wire

Application

Suction and delivery hose for: Granules, pellets, fertilizers and other abrasive materials. For applications in the chemical industry, industry for the manufacturing of wood and plastic materials, ventilation, pharmaceutical industry, mechanical engineering. Any application where static electricity can be generated

Structure

Hose in soft PVC with rigid PVC spiral Abrasion resistant PU- Liner 8 strand copper wire PU is FDA and EC approved for food contact with dry foods.

Colour

Crystal clear transparent wall. Grey. orange or ivory spiral.

Working Temperature

-15° + 65° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product