


INDUSTRIAL NO ABRASION AS

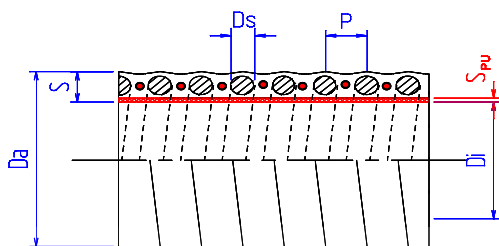

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
32	42	750	7x	10	9	30/50
35	45	800	7x	9	9	30/50
38	48	850	7x	9	9	30/50
40	50	900	7x	9	9	30/50
45	56	1055	7x	8	9	30/50
50	61	1260	7x	8	9	30/50
51	62	1310	7x	8	9	30/50
55	66,5	1465	7x	7,5	9	30/50
60	72	1665	7x	7,5	9	30/50
63	75,5	1740	7x	7	9	30/50
65	78	1815	7x	7	9	30/50
70	84	1970	7x	6,5	9	30/50
75	89	2070	7x	6,5	9	30/50
76	90	2175	7x	6,5	9	30/50
80	94	2275	7x	6,5	9	30/50
89	104	2675	8x	5,5	9	30/50
90	105	2725	8x	5,5	9	30/50
100	116	3390	8x	5	9	30
102	118	3490	8x	5	9	30
110	127	3740	8x	4,5	9	30
120	138	4090	8x	4	9	30
125	143	4290	8x	3	9	30
127	145	4390	8x	3	9	30
150	171	6400	8x	3	9	20
152	173	6500	8x	3	9	20
203	227	10650	10x	3	9	10
254	276	13580	10x	2	9	10

Description

Superior resistance against pressure, vacuum and internal abrasion.

Application

Suction and delivery hose in particular for sand, gravel, cement, slurry etc. Specially suitable for abrasive mediums. Resistant to atmospheric conditions and to most chemicals. Available also with food approved PU according to FDA and CEE standards

Structure

Flexible PVC hose with rigid PVC spiral and PU liner. 8 strand copper anti-static wire (red dot). Thicker PU liner upon request

Colour

Standard: metallic green wall, ivory spiral, red PU liner FQ: orange wall, white PU, ivory spiral. Available in other colours upon request

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product