


NOVIDRINK

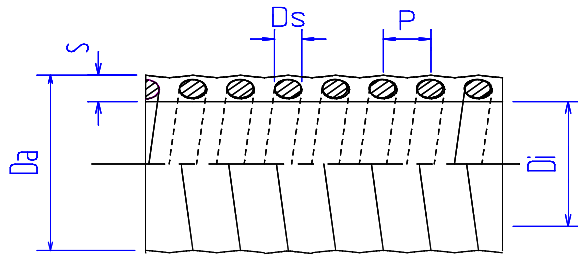

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
25	34	550	5 x	8	9	50
30	39	570	5 x	8	9	50
32	41	640	5 x	8	9	50
35	44	660	5 x	7	9	50
38	46,6	700	5 x	7	9	50
40	49	740	5 x	7	9	50
45	54	900	5 x	7	9	50
50	60	1050	5 x	6	9	50
51	60,3	1070	5 x	6	9	50
55	65	1100	5 x	6	9	50
60	70	1300	5 x	6	9	50
63	74	1400	5 x	6	9	50
65	76	1500	5 x	5,5	9	50
70	82	1650	5 x	5	9	30/50
75	87	1750	5 x	4,5	9	30/50
76	89	1750	5 x	4,5	9	30/50
80	92	1900	5 x	4,5	9	30/50
89	101	2150	5 x	4	9	30/50
90	103	2170	5 x	4	9	30/50
100	113	2700	5 x	4	9	30/50
102	115	2700	5 x	4	9	30/50
110	124	3100	5 x	3	9	30/50
120	135	3350	5 x	3	9	30/50
125	140	3600	5 x	3	9	30/20
127	142	3600	5 x	3	9	30/20
150	166	4500	5 x	2,5	9	20
152	168	4500	5 x	2,5	9	20
203	220	8750	5 x	2	9	10

Description

Suction and delivery hose for medium applications made of Food Quality flexible PVC reinforced with a rigid PVC spiral.

Application

For medium applications. Suction and delivery hose in many industries. Suitable for transfer of liquids in the food industry and drinks with a maximum alcohol content of 28%.

Structure

Hose in soft PVC with a hard PVC spiral shock resistant.

Colour

Transparent flexible PVC wall, red spiral

Working Temperature

-25 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product