


NOVIATOX HEAVY

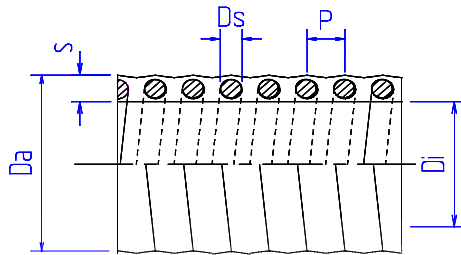

Appearance in reality may change

I. Diam ±4% mm	E. Diam ±4% mm	Weight ±4% g/m	Min. Bending Radius n x Da	Max Working Pressure bar	Vacuum m water	Coil length max m
19	25,5	300	5 x	9	8	30/50
20	26,5	315	5 x	9	8	30/50
25	32,5	400	5 x	8	7,5	30/50
30	37,5	450	5 x	8	7,5	30/50
32	39,5	480	5 x	7,5	7,5	30/50
35	43	550	5 x	7	7,5	30/50
38	46	580	5 x	7	7,5	30/50
40	48,5	600	5 x	6,5	7,5	30/50
45	53	700	5 x	6	7,5	30/50
50	58	850	5 x	5,5	7,5	30/50
51	59,5	865	5 x	5,5	7,5	30/50
55	63,5	940	5 x	5,5	7	30/50
60	69	1000	5 x	5	7	30/50
63	72	1100	5 x	5	7	30/50
65	74	1130	5 x	5	7	50/30
70	80	1250	5 x	5	7	30/50
75	85	1400	5 x	4,5	7	30/50
76	86	1420	5 x	4,5	7	30/50
80	90,5	1600	5 x	4	7	30/50
89	101	1850	5 x	4	7	50/30
90	102	1870	5 x	4	7	30/50
100	112,5	2200	5 x	4	7	30/50
102	114,5	2240	5 x	3,5	7	30/50
110	122,5	2500	5 x	3,5	7	30/50
120	132,5	2800	5 x	3	7	30
125	138,5	3200	5 x	3	7	30/20
127	140,5	3260	5 x	3	7	30/20
130	144	3320	5 x	2,5	7	20
150	165	4300	5 x	2,5	7	20
152	167	4400	5 x	2,5	7	20

Description

Non-Toxic PVC Hose for delivery and suction, suitable for medium tasks. Excellent resistance to atmospheric conditions and chemicals.

Application

Highly suitable hose for pneumatic conveying of granules, vacuum pumps, agricultural machines, Irrigation plants, chemical plants, boatbuilding, plastics manufacturing machinery, sludge tankers and also for suction of foodstuffs, water, fertilizers and pesticides.

Structure

Highly flexible construction of food grade PVC wall reinforced by an integral shock resistant rigid PVC helix. Smooth inside.

Colour

Standard colours: Crystal clear with ivory or grey spiral

Working Temperature

-15 + 60° C

Please contact us for additional versions

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product