


SUPERGRANULAT PU

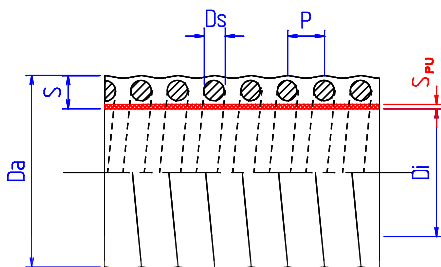

Appearance in reality may change

| I. Diam ±4% mm | E. Diam ±4% mm | Weight ±4% g/m | Min. Bending Radius n x Da | Max Working Pressure bar | Vacuum m water | Coil length max m |
|----------------------|----------------------|----------------------|-------------------------------|-----------------------------|-------------------|----------------------|
| 30 | 36,5 | 525 | 4,5 | 8 | 7,5 | 30 |
| 32 | 39 | 570 | 4,5 | 8 | 7,5 | 30 |
| 38 | 45 | 600 | 4,5 | 8 | 7,5 | 30 |
| 40 | 47,8 | 640 | 4,5 | 8 | 7,5 | 30 |
| 45 | 52,8 | 680 | 4,5 | 8 | 7,5 | 30 |
| 50 | 58 | 825 | 4,5 | 7 | 7,5 | 30 |
| 51 | 59 | 850 | 4,5 | 7 | 7,5 | 30 |
| 55 | 63 | 900 | 4,5 | 7 | 7,5 | 30 |
| 60 | 68,4 | 985 | 4,5 | 7 | 7,5 | 30 |
| 63 | 71,2 | 1085 | 4,5 | 6 | 7,5 | 30 |
| 65 | 73 | 1160 | 4,5 | 6 | 7,5 | 30 |
| 70 | 79,6 | 1235 | 5,5 | 5,5 | 7,5 | 30 |
| 75 | 84,6 | 1370 | 5,5 | 5,5 | 7,5 | 30 |
| 76 | 85 | 1390 | 5,5 | 5 | 7,5 | 30 |
| 80 | 90,6 | 1675 | 5,5 | 5 | 7,5 | 30 |
| 89 | 101 | 1925 | 5,5 | 4,5 | 7,5 | 30 |
| 90 | 102 | 1940 | 5,5 | 4,5 | 7,5 | 30 |
| 102 | 114,6 | 2340 | 5,5 | 4,5 | 7,5 | 30 |
| 120 | 133 | 2890 | 5,5 | 4 | 7,5 | 30 |
| 127 | 141 | 3350 | 5,5 | 4 | 7,5 | 20 |
| 152 | 167 | 4450 | 5,5 | 4 | 7,5 | 20 |
| 180 | 176 | 5920 | 5,5 | 3 | 7,5 | 10 |
| 200 | 218 | 6850 | 6 | 2,5 | 7,5 | 10 |

Description

Light and flexible hose
 Abrasion resistant PU-liner

Application

Suction and delivery hose
 for: Granules, pellets, fertilizers
 and other abrasive materials.
 For applications in the chemical
 industry, industry for the
 manufacturing of wood and
 plastic materials, ventilation,
 pharmaceutical industry,
 mechanical engineering.

Structure

Hose in soft PVC with rigid
 PVC spiral Abrasion resistant
 PU- Liner PU is FDA and BGA
 approved

Colour

Crystal clear transparent wall.
 Grey, orange or ivory
 spiral.Transparent PU-liner

Working Temperature

-15° + 65° C

**Please contact us for
 additional versions**

Technical data @ 22 °C

Manufacturer reserves the right to change technical characteristics without prior notice and cannot be held responsible for improper use of the product